

PRODUCT DESCRIPTION

Product made to order.

- Available in different lengths
- Strong attachment of facade profiles
- Correcting the position of the lighting fixture on an uneven surface
- Adjustable lighting angle of the lighting fixture

Fill empty fields

Product nr.

Fixture type

Company

Job name

Date



TECHNICAL SPECIFICATION

Application

- for fixing LED lighting fixtures in facade systems

Mounting

- to the surface, using properly selected screws
- to the lighting fixture, with hooks

Additional information

- possibility to fasten the luminaire at the back or side
- recommendation:
 - 2 mounting brackets every 1 m of the lighting fixture
 - 4 mounting brackets every 2 or 3 m of the lighting fixture
- lengths available on request (where A is the distance of the fixture from the surface, adjustable in the range of +/- 7.5 mm / 0.3 "):

A = 45 mm / 1.77" (+/- 7,5 mm / 0.3")

A = 55 mm / 2.17" (+/- 7,5 mm / 0.3")

A = 65 mm / 2.55" (+/- 7,5 mm / 0.3")

A = 75 mm / 2.95" (+/- 7,5 mm / 0.3")

A = 85 mm / 3.34" (+/- 7,5 mm / 0.3")

A = 95 mm / 3.74" (+/- 7,5 mm / 0.3")

A = 105 mm / 4.13" (+/- 7,5 mm / 0.3")

A = 115 mm / 4.53" (+/- 7,5 mm / 0.3")


A = 125 mm / 4.92" (+/- 7,5 mm / 0.3")

A = 135 mm / 5.31" (+/- 7,5 mm / 0.3")

A = 145 mm / 5.71" (+/- 7,5 mm / 0.3")

A = 155 mm / 6.10" (+/- 7,5 mm / 0.3")


TECHNICAL DRAWING

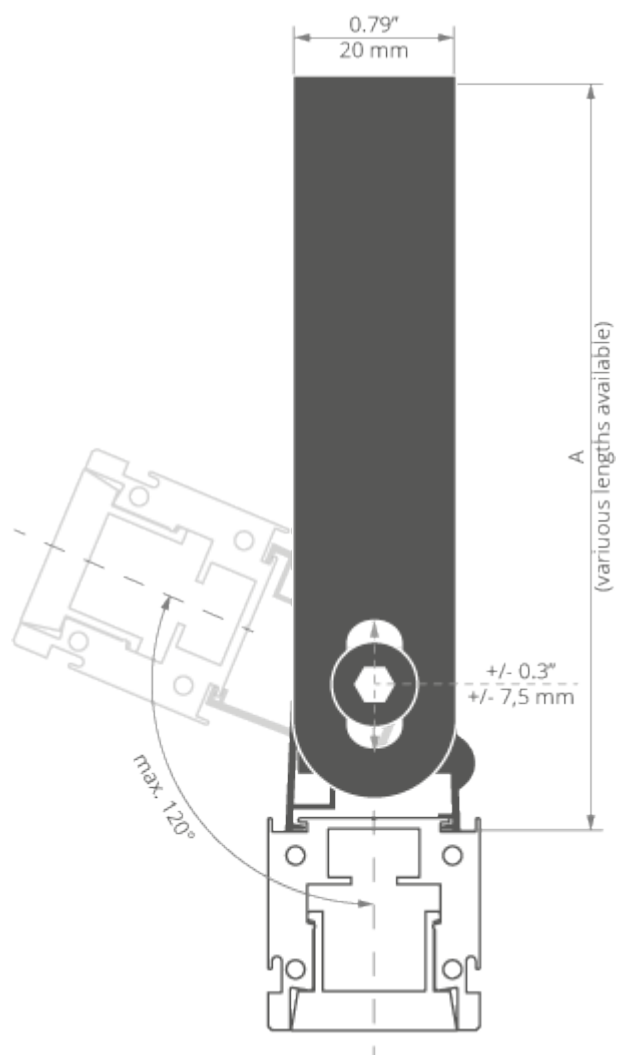

RELATED PROFILES



HR-OPTI System
Ref: C1844 (HR-
OPTI) + 42121



HR-OPTI Profile
Ref: C1844