


- Side emitting LED strip
- UL Listed
- CRI 90+



Technical specification

Model	Input voltage	Power consumption	Color temperature	Diode QTY per meter	Lumen output	Max run length	Beam angle	LED width
WP-K-SE-27-1210-8-24V	24 V	4.8 W/m	2700 K	60 pcs/m	259 lm/m	6 m	120 °	10 mm
WP-K-SE-30-1210-8-24V	24 V	4.8 W/m	3000 K	60 pcs/m	265 lm/m	6 m	120 °	10 mm
WP-K-SE-40-1210-8-24V	24 V	4.8 W/m	4000 K	60 pcs/m	275 lm/m	6 m	120 °	10 mm
WP-K-SE-50-1210-8-24V	24 V	4.8 W/m	5000 K	60 pcs/m	278 lm/m	6 m	120 °	10 mm

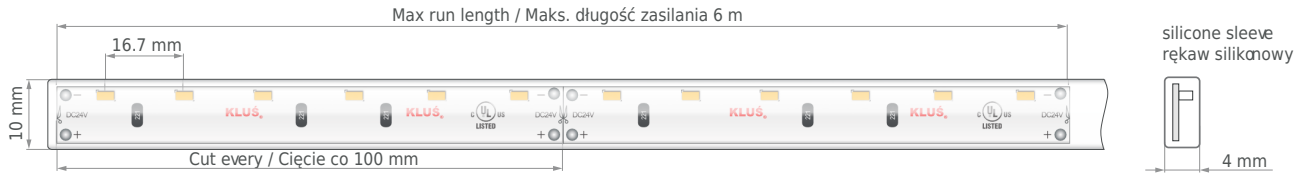


LIGHTING DIRECTION



RELATED PROFILES



STEP Profile
Ref: 18042



STEPUS Profile
Ref: 18038