

PRODUCT DESCRIPTION

- Designed to reach an IP67 waterproof rating
- Narrow line of light
- Profile flush with the ceiling or wall surface
- Invisible aluminum components

FINISH :

Non anodized (raw)

*Custom colors available upon request



Fill empty fields

Product nr.

Fixture type

Company

Job name

Date

TECHNICAL SPECIFICATION

Application

- for a fixture with the line-of-light effect, flush with the ceiling surface, without visible aluminum elements

Assembly

- for mounting in a cardboard-gypsum board using fixing glues, then meshed and finished with plaster

- the protective insert TECH-KA ensures that the profile slot remains wide enough for the snap-in cover. Its use is necessary during mounting and finishing works.

Additional information

- possibility of making a linear fixture with IP67 protection, which means the fixture is dustproof and waterproof - equipped with an additional TECH-KA protective insert, which protects essential elements against soiling during mounting

- space for LED strip: 13.4 mm

Line of light

 \checkmark = Line of Light X = Visible dotting

Profile:	LED Model:	HS/HS-12/HS-22 black	Liger/Liger-22 black	Liger/ Liger-22 black	KA frosted	KA-PRO frosted
KOZMA						




1210	Х	Х	Х	Х	Х
1220	Х	Х	Х	Х	Х
1275	Х	\checkmark	Х	Х	Х
0530	✓	\checkmark	1	Х	1
1910	✓	\checkmark	1	Х	✓
1820	✓	\checkmark	1	Х	✓

AVAILABLE LENGTHS

Ref. nr.	surface finish	available lengths
18040NA_1	Non anodized (raw)	1000 mm
18040NA_2	Non anodized (raw)	2000 mm
18040NA_3	Non anodized (raw)	3000 mm

TECHNICAL DRAWING





RELATED PRODUCTS


COVERS

BLACK COVERS





CLEAR COVERS

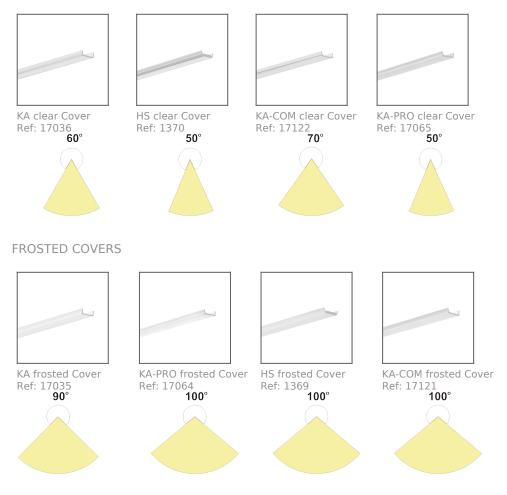





END CAPS

REGULAR END CAPS



KOZMA grey End cap Ref: 24217

ACCESSORIES

COMPONENTS FOR CONNECTING PROFILES









ZM-NA-PION-135 Connector Ref: 42727

ZM-NA-PION-90 Connector Ref: 42726



Connector Ref: 42725



ZM-NA-45 Connector Ref: 42339



× × ×

ZM-NA-PION-120 Connector Ref: 42321



ZM-NA-180





ZM-NA-PION-60 Connector Ref: 42317

ZM-NA-PION-45 Connector Ref: 42315

SEALING COMPONENTS




6x1,2 Gland Ref: 00802




TECH-KA protective insert Ref: 17123

LED TAPES

WHITE

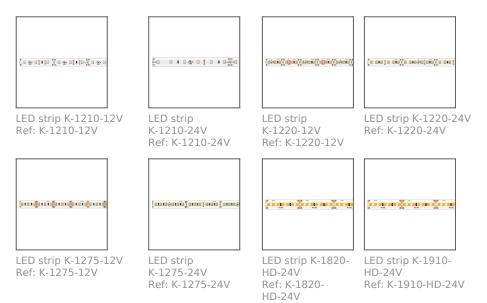



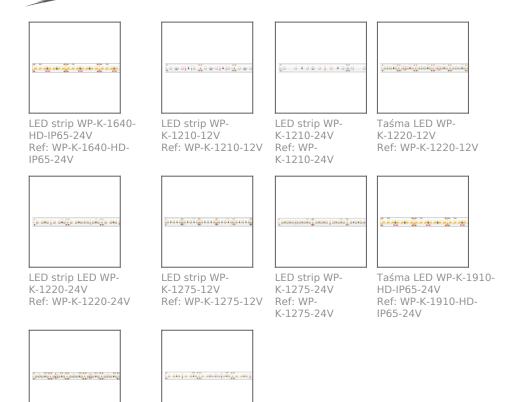

LED strip WP-K-1220-IP65-12V Ref: WP-K-1220-IP65-12V

LONG RUN



LED strip K-LR-1000-24V Ref: K-LR-1000-24V

RGB / RGB-W

0 0 0 0	्रिये व	B	0 💆 0	0000 0000 0000	

LED strip K-1275-RGB-24V Ref: K-1275-RGB-24V



LED strip WP-K-1220-IP65-24V

IP65-24V

Ref: WP-K-1220-

LED strip WP-K-1275-RGB-12V Ref: WP-K-1275-RGB-12V

รู้สามารถอาติ สามารถอาติสามารถอาติ
LED strip K-1530- RGB+W-24V

LED strip K-1530-RGB+W-24V Ref: K-1530-RGB+W-24V

101	• •	<u>₽</u> - <u>=</u>	•	 ž	0000	Ĩ

LED strip K-1215-RGB-12V Ref: K-1215-RGB-12V



2 101 0	101	∎ <u>®</u> ∎	101 0

LED strip K-1215-RGB-24V Ref: K-1215-RGB-24V



LED strip K-1225-

RGB-12V

RGB-12V

Ref: K-1225-

LED atria	K 1225
LED strip	K-1225-
RGB-24V	

Ref: K-1225-

RGB-24V

a to a point of a section of the section of the

0464¥0464¥046	

ſ

LED strip K-1920-120-RGB-24V 19.2W/m Ref: K-1920-120-RGB-24V




LED strip WP-K-1920-120-RGB-24V Ref: WP-K-1920-120-RGB-24V

TUNABLE WHITE / DIM TO WARM



LED strip K-27/65-1920-24V K-27/65-1920-24V Ref: K-27/65-1920-24V K-27/65-1920-24V

LED strip WP-Ref: WP-



K-22/50-1728-24V K-30/18-1770-24V Ref: Ref: K-22/50-1728-24V K-30/18-1770-24V

MARKETING MATERIALS



Presentation set 6 Display Ref: 90125



P230-90154M Ref: 90154M



Display P230-90175M Ref: 90175M



Foam 70424 Ref: 70424