

## PRODUCT DESCRIPTION

- Lighting direction of the fixture at an angle of 45 degrees to the surface
- The position can be corrected after screwing
- High mechanical and weather resistance

Fill empty fields


Product nr.

Fixture type

Company

Job name

Date



## TECHNICAL SPECIFICATION


### Application

- for mounting LED lighting fixtures

### Mounting

- to the surface, using properly selected screws
- to the lighting fixture, with hooks
- easy installation and deinstallation of lighting fixtures by snapping in and out


## TECHNICAL DRAWING

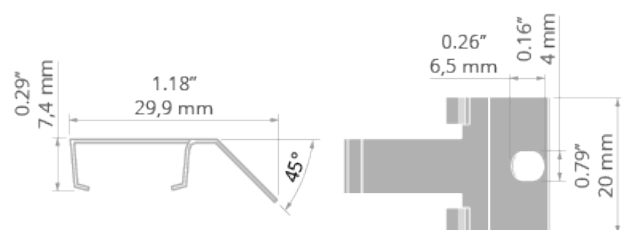


RELATED PROFILES




45-16 Profile  
Ref: B8504




TAMI Profile  
Ref: B5390




PDS-4-ALU Profile  
Ref: B1718




REGULOR Profile  
Ref: B468+43




PDS-O Profile  
Ref: B3777



PDS-4-PLUS  
Profile  
Ref: C1263



TAPO Profile  
Ref: C1919



MICRO-PLUS  
Profile  
Ref: C2966