


- LED pásek s boční osvitem
- Certifikát UL Listed
- CRI 90+



Technická specifikace

Model	NAPÁJECÍ NAPĚTÍ	výkon	BARVA SVĚTLA	Ilość LED szt./m	SVĚTELNÝ TOK	Max. délka napájení	Úhel svitu	Šířka LED
WP-K-SE-27-1210-8-24V	24 V	4.8 W/m	2700 K	60	259 lm/m	6 m	120 °	10 mm
WP-K-SE-30-1210-8-24V	24 V	4.8 W/m	3000 K	60	265 lm/m	6 m	120 °	10 mm
WP-K-SE-40-1210-8-24V	24 V	4.8 W/m	4000 K	60	275 lm/m	6 m	120 °	10 mm
WP-K-SE-50-1210-8-24V	24 V	4.8 W/m	5000 K	60	278 lm/m	6 m	120 °	10 mm

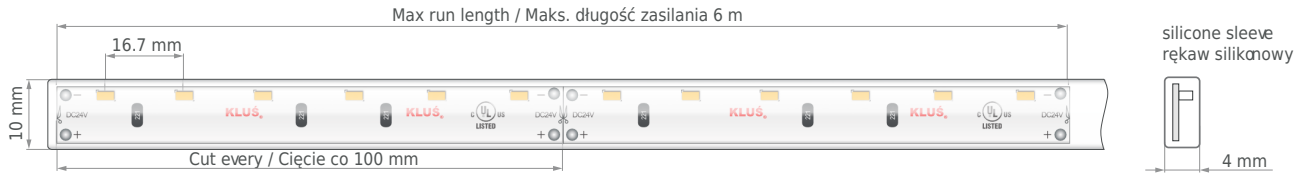


SMĚR OSVĚTLENÍ



SOUVISEJÍCÍ PROFILY



Profil STEP
Ref: 18042



Profil STEPUS
Ref: 18038