

Mounting bracket DCP

Ref. C28058C00

Ref. arch 24333

- Convenient cable routing
- Easy installation without the use of glue

APPLICATION

- routing cables with round or oval cross-section with a diameter of min. fi 3 mm to max. 5 mm
- routing flat cables from min. 1.7 mm x 2.5 mm to max. 3 mm x 5 mm

MOUNTING



- to the surface, using double-sided adhesive tape

ADDITIONAL INFORMATION

- possibility of using two halves of the mounting bracket on an open surface or one half to route the cable in the corners



TECHNICAL DRAWING

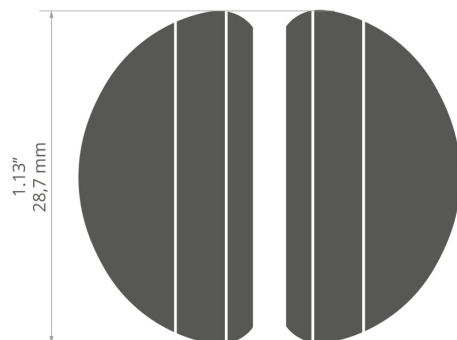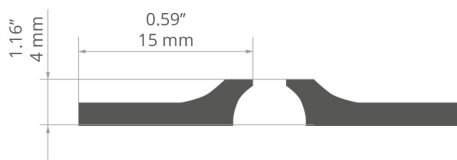

TECHNICAL SPECIFICATIONS

Material	PS	Width	28.7 mm
Color	■ gray	Height	4 mm

Mounting bracket DCP

Ref. C28058C00

Ref. arch 24333

KLUŚ Inspiring
Solutions

SAMPLE PROJECTS

