


Cover DHS

Ref. B17052M, B17052T

Ref. arch 17052, 17063

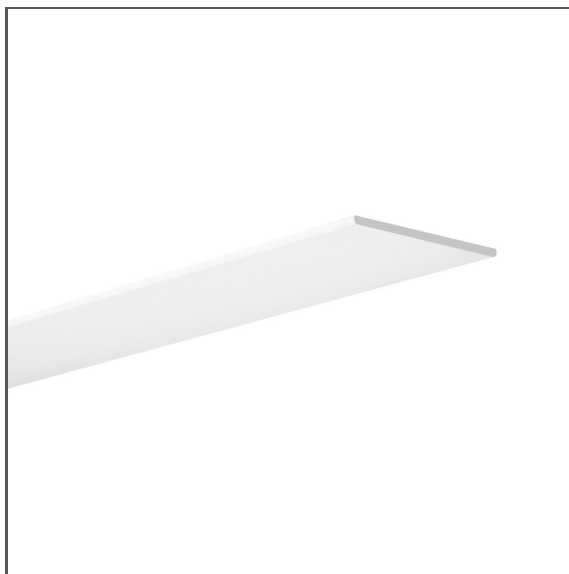

APPLICATION

- LED protection and light diffusion in lighting fixtures


MOUNTING

- to the profile, by pressing

ADDITIONAL INFORMATION

- standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
 - when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING



TECHNICAL SPECIFICATIONS

Material	PC
Shape	flat
Maximum length on request	3000 mm
Width	46.5 mm
Possibility of obtaining a line of light	yes
UV resistance	yes

Color	Length	Light transmission	Ref
☐ frosted	1000 mm	73 %	B17052M_1 17052_1
	2005 mm		B17052M_2 17052_2
	3010 mm		B17052M_3 17052_3
▨ clear	1000 mm	94 %	B17052T_1 17063_1
	2005 mm		B17052T_2 17063_2
	3010 mm		B17052T_3 17063_3

Cover DHS

Ref. B17052M, B17052T

Ref. arch 17052, 17063

RELATED PROFILES > FOR MAIN LIGHTING



DES
A18030
Ref. arch 18030




GLADES
A18036
Ref. arch 18036

RELATED PROFILES > FOR SCONCES AND WALL LIGHTING



KIDES
A18031
Ref. arch 18031



OBIT
A04826
Ref. arch W4826