


Profile EX-ALU

Ref. A18043

Ref. arch 18043

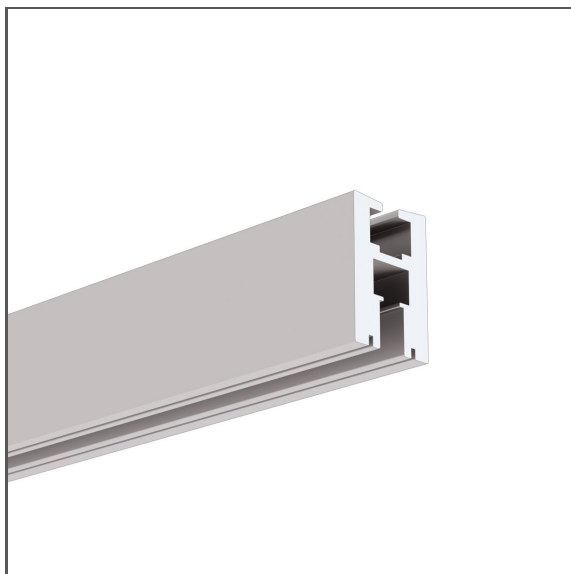

- Backlight and attachment for transparent panels with a thickness of 6 mm | 0.24"
- High mechanical resistance

APPLICATION

- surface mounting and decorative illumination of transparent signs and panels


MOUNTING

- to the surface, using properly selected screws

ADDITIONAL INFORMATION

- with a vertically attached profile, the panel must not protrude more than 51 cm from the wall. Its vertical dimension must not be less than 60% of the horizontal dimension
- with a horizontally attached profile, the panel must not protrude more than 51 cm from the ceiling
- standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING

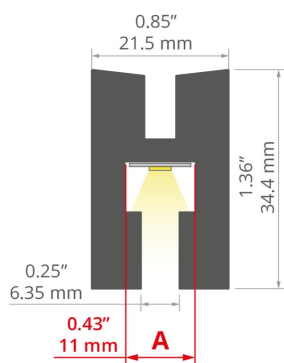

TECHNICAL SPECIFICATIONS

Material	aluminum
Color	■ silver anodized
Possible fixture IP	20
Possible fixture shapes	rectangular
Profile cross-section	rectangular
Width	21.5 mm
Height	34.4 mm
LED gluing width A	11 mm
Number of LED strips A (8 mm wide)	1
Building type	Commercial, Retail, Entertainment/ Arts, Residential
Facility zone	advertising / POS, shop windows and exhibition, kitchen, furniture
Wire out back of extrusion	yes


Length	Ref
1000 mm	A18043A_1 18043ANODA_1
2005 mm	A18043A_2 18043ANODA_2
3010 mm	A18043A_3 18043ANODA_3

Profile EX-ALU




Ref. A18043

Ref. arch 18043

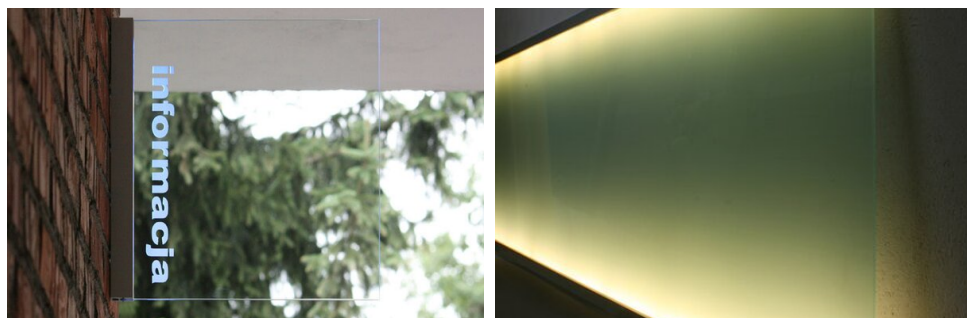
SAMPLE PROJECTS



RELATED ACCESSORIES > RELATED END CAPS

NAME		MATERIAL	COLOR	REF.
EX		steel	<input checked="" type="checkbox"/> gray	C24437N00 0963
EX-3D		PU	<input type="checkbox"/> white	C24363C10 0962
EX-3D-OTW		PU	<input type="checkbox"/> white	C24363C10TW 1452

RELATED ACCESSORIES > RELATED LED



K-1210-12V

K-1210-12

Ref. arch K-1210-12V



K-1275-12V

K-1275-12


Ref. arch K-1275-12V



WP-K-1220-12V

KWP-1220-12

Ref. arch WP-K-1220-12V

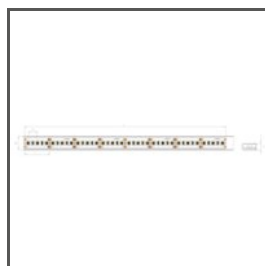

WP-K-1275-12V

KWP-1275-12


Ref. arch WP-K-1275-12V



WP-K-1220-IP65-12V

_błąd

Ref. arch WP-K-1220-IP65-12V

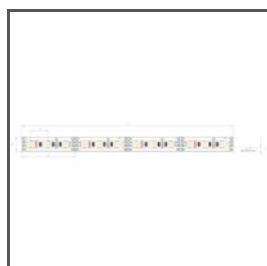


K-1275-RGB-12V

K-RGB-1275-12

Ref. arch K-1275-RGB-12V


RELATED ACCESSORIES > RELATED LED > HIGH EFFICACY

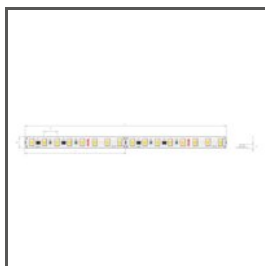

K-HE-0480-HD-24V

K-HEHD-0480-24


Ref. arch K-HE-0480-HD-24V



K-HE-0960-HD-24V

K-HEHD-0960-24


Ref. arch K-HE-0960-HD-24V



K-HE-1440-HD-24V

K-HEHD-1440-24

Ref. arch K-HE-1440-HD-24V

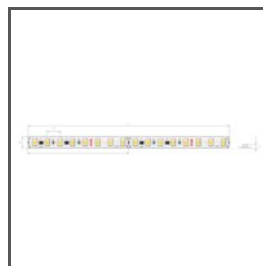

K-HE-1920-HD-24V

K-HEHD-1920-24

Ref. arch K-HE-1920-HD-24V

RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CTT



K-1530-RGB+W-24V

K-RGBW-1530-24


Ref. arch K-1530-RGB+W-24V



K-1920-120-RGB-24V

K-RGB-1920-120-24

Ref. arch K-1920-120-RGB-24V



WP-K-1920-120-RGB-24V

KWP-1920-120-RGB-24

Ref. arch WP-K-1920-120-RGB-24V

RELATED ACCESSORIES > RELATED LED > WHITE MONO



WP-K-1640-HD-IP65-24V

KWP-GHD-1640-24

Ref. arch WP-K-1640-HD-IP65-24V



WP-K-1910-HD-IP65-24V

KWP-GHD-1910-24

Ref. arch WP-K-1910HDIP6524V



WP-K-1220-IP65-24V

KWP-1220-IP65-24

Ref. arch WP-K-1220-IP65-24V

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > OTHER



GLAND

6x1,2

C24517C07

Ref. arch 00802