


Cover FOLED-50

Ref. B17171S

Ref. arch 17171

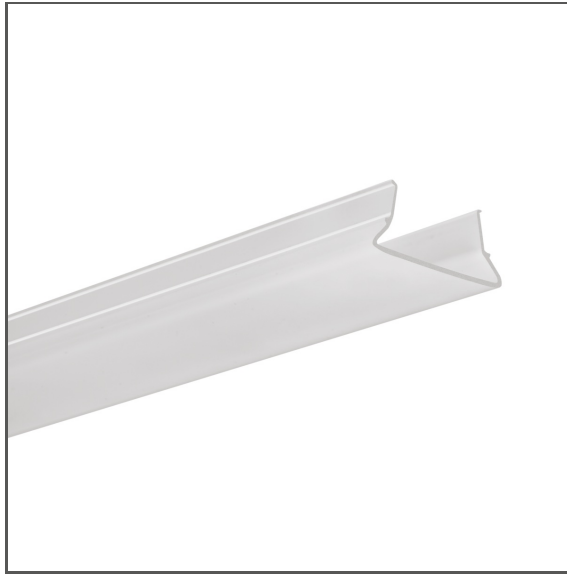

APPLICATION

- LED protection and light diffusion in lighting fixtures


MOUNTING

- to the profile, by pressing

ADDITIONAL INFORMATION

- ATTENTION! rigid cover, not intended for bending or deformation
- standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING

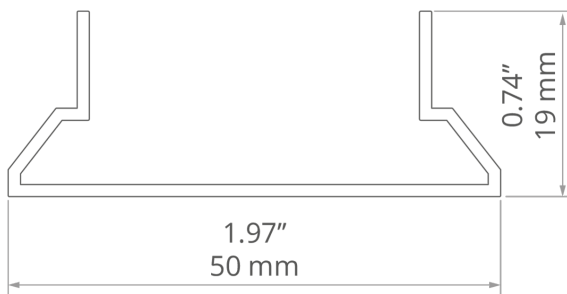

TECHNICAL SPECIFICATIONS

Finish	satin
Material	PMMA
Shape	flat
Maximum length on request	6000 mm
Light transmission	70 %
Width	50 mm
Possibility of obtaining a line of light	yes
UV resistance	yes


Length	Ref
1000 mm	B17171S_1 17171_1
2005 mm	B17171S_2 17171_2
3010 mm	B17171S_3 17171_3

Cover FOLED-50


Ref. B17171S

Ref. arch 17171

SAMPLE PROJECTS

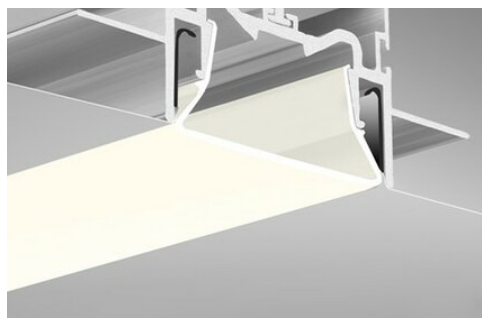


RELATED PROFILES > STRETCH CEILINGS



FOLED-50
A03632
Ref. arch C3632



FOLED-50-BOK
A0A57945
Ref. arch SA57945



FOLED-50-SUF
A03631
Ref. arch C3631

RELATED ACCESSORIES > RELATED END CAPS

NAME	MATERIAL	COLOR	REF.
FOLED-50-W	PMMA	<input type="checkbox"/> white	C24294C02 24294