


# Profile FOLHAK

Ref. A08338

Ref. arch B8338

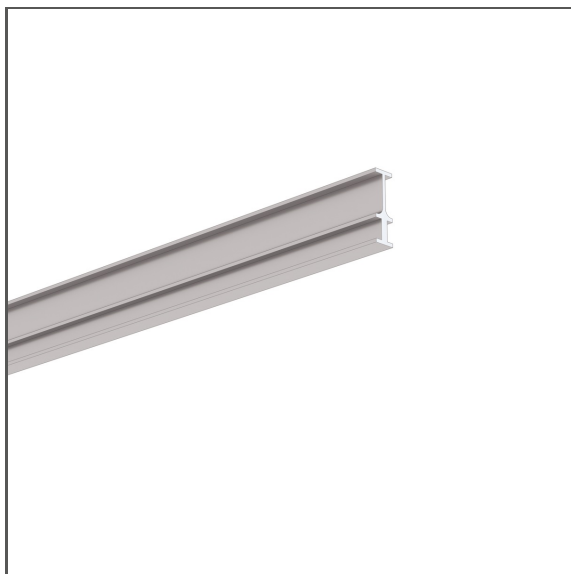

- Mounting track
- Installation of lighting and stretch films in suspension

## APPLICATION

- makes suspending the FOLED profile easy


## MOUNTING

- suspended, using dedicated accessories


## ADDITIONAL INFORMATION

- mounting strip can be used in sections
- standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance  $\pm 1.5$  mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

## TECHNICAL DRAWING

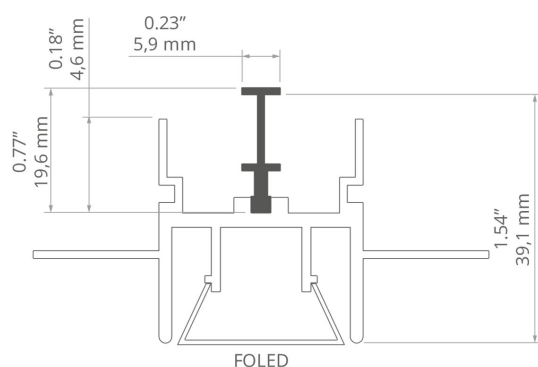

## TECHNICAL SPECIFICATIONS

Material	aluminum
Color	 silver non anodized
Width	5.9 mm
Height	19.6 mm
Building type	Residential, Retail, Entertainment/ Arts, Commercial
Facility zone	communication routes and corridors, industrial and technical

Length	Ref
1000 mm	A08338N_1 B8338NA_1
2005 mm	A08338N_2 B8338NA_2


# Profile FOLHAK

Ref. A08338

Ref. arch B8338

**KLUŚ** Inspiring  
Solutions

## SAMPLE PROJECTS

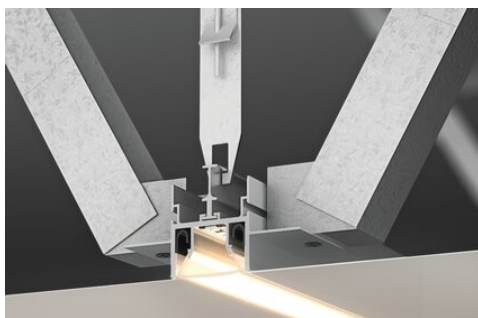

## RELATED PROFILES > STRETCH CEILINGS



**FOLED**  
A08332V1  
Ref. arch B8332V1



**FOLED-50**  
A03632  
Ref. arch C3632

## RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > MOUNTING BRACKETS



**SPRING HANGER**  
Z71000  
Ref. arch 79106