


Cover G-22S

Ref. B17013T, B17013S, B17013B, 17007, B17204F

Ref. arch 17016, 17013, 17014, 17007, 00415

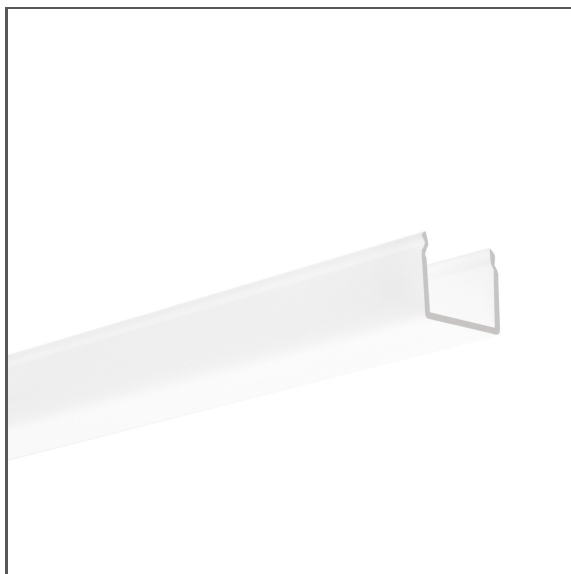

APPLICATION

- LED protection and light diffusion in lighting fixtures

MOUNTING

- to the profile, by pressing

ADDITIONAL INFORMATION

- ATTENTION! rigid cover, not intended for bending or deformation
- standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING



TECHNICAL SPECIFICATIONS

Material	PMMA
Shape	square
Maximum length on request	6000 mm
Width	24 mm
UV resistance	yes

Finish	Light transmission	Length	High mechanical resistance	Ref
semi-transparent	88 %	1000 mm	yes	B17013T_1 17016_1
		2005 mm		B17013T_2 17016_2
		3010 mm		B17013T_3 17016_3
satin	72 %	1000 mm	no	B17013S_1 17013_1
		2005 mm		B17013S_2 17013_2
		3010 mm		B17013S_3 17013_3
black	24 %	1000 mm	no	B17013B_1 17014_1
		2005 mm		B17013B_2 17014_2
		3010 mm		B17013B_3 17014_3
frosted	88 %	1000 mm	yes	B17204F_1 00415_1
		2005 mm		B17204F_2 00415_2

Cover G-22S

Ref. B17013T, B17013S, B17013B, 17007, B17204F

Ref. arch 17016, 17013, 17014, 17007, 00415

Finish	Light transmission	Length	High mechanical resistance	Ref
		3010 mm		B17204F_3 00415_3

RELATED PROFILES



LESTO
B5551

RELATED PROFILES > ARCHITECTURAL



GIZA-LL
A00758
Ref. arch C0758



GIZA-LL-T
A02479
Ref. arch C2479



GIZA-LL-UST
A02724N
Ref. arch C2724



GLAZA-LL
A02627
Ref. arch C2627




KOZEL
A06454
Ref. arch B6454



KOZUS
A07823
Ref. arch B7823



KOZUS-CR
A00600
Ref. arch C0600



LARKO
A05552
Ref. arch B5552



LIPOD
A05554
Ref. arch B5554



LOC-30
A18015
Ref. arch 18015



LOKOM
A05553
Ref. arch B5553



OPAC-30
A06164
Ref. arch B6164