


# Profile GIZA-LL-T

Ref. A02479

Ref. arch C2479

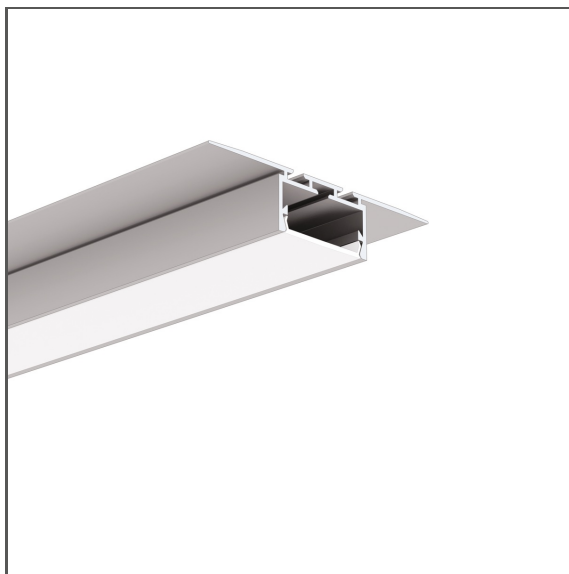

- Mounting to 12,5 mm - 0.49" drywall
- No collision with the ceiling structure
- Stable mounting to a suspended ceiling
- Non visible aluminum elements

## APPLICATION

- main, decorative and functional lighting


## MOUNTING

- in drywall, with screws
- can be easily connected into runs and systems

## ADDITIONAL INFORMATION

- smooth transition from a recessed into a suspended fixture
- in order to protect the lighting fixture during installation, a TECH-22 protective insert should be used
- standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance  $\pm 1.5$  mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

## TECHNICAL DRAWING

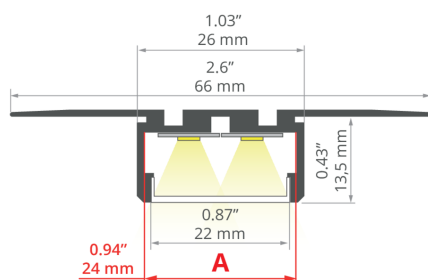

## TECHNICAL SPECIFICATIONS

Material	aluminum
Color	■ silver non anodized
Possible fixture IP	20
Possible fixture shapes	polygonal
Profile cross-section	rectangular
Width	66 mm
Height	14.5 mm
LED gluing width A	24 mm
Number of LED strips A (8 mm wide)	3
Possibility of obtaining a line of light	yes
Building type	Commercial, Retail, Entertainment/ Arts
Facility zone	communication routes and corridors, lobby / foyer
The cover is cut to the length of the profile	yes
Can be easily connected into runs	yes
Wire out back of extrusion	yes

Length	Ref
1000 mm	A02479N_1 C2479NA_1
2005 mm	A02479N_2 C2479NA_2
3010 mm	A02479N_3 C2479NA_3

# Profile GIZA-LL-T

Ref. A02479

Ref. arch C2479

**KLUŚ** Inspiring  
Solutions

## SAMPLE PROJECTS



## RELATED PROFILES > ARCHITECTURAL



### GIZA-LL

A00758





















Ref. arch C0758

# Profile GIZA-LL-T

Ref. A02479

Ref. arch C2479

## RELATED ACCESSORIES > RELATED COVERS





NAME	MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
DILENSO <span style="background-color: red; color: white; padding: 2px;">NEW</span>		PC	56 %	 clear B17173 17173
			47 %	 frosted B17203M 00413
			69 %	B17006M 17010
G-L		PMMA	85 %	 semi-transparent 17008 17008
			95 %	 clear B17006T 17006
			85 %	 semi-transparent B17006F 17017
			17008 17008	
			95 %	 clear B17006T 17006
G-K		PMMA	88 %	 semi-transparent B17013F 17016
			72 %	 frosted B17013M 17013
			24 %	 black B17013C 17014
			73 %	 frosted B17011M 17011
HS-22		PC	94 %	 clear B17011T 17022
			62 %	 frosted B17032M 17032V1
LIGER-22		PC	B17032M 17032V1OP	
			39 %	 black B17032C 17087
MUN-22		PC	86 %	 semi-transparent B17042F 17042

# Profile GIZA-LL-T

Ref. A02479

Ref. arch C2479

## RELATED ACCESSORIES > RELATED END CAPS

NAME	MATERIAL	COLOR	REF.
GIZA-LL		 gray	C24281C02 24281
		 white	C24281C10 24398
		 black	C24281C07 24383

## RELATED ACCESSORIES > RELATED LED




**K-1275-12V**  
K-1275-12  
Ref. arch K-1275-12V



**WP-K-1220-12V**  
KWP-1220-12  
Ref. arch WP-K-1220-12V



**WP-K-1220-IP65-12V**  
\_biał  
Ref. arch WP-K-1220-IP65-12V




**K-1275-RGB-12V**  
K-RGB-1275-12  
Ref. arch K-1275-RGB-12V

## RELATED ACCESSORIES > RELATED LED > CRI 95+




**WP-K-CR-1210-24V**  
KWP-CR-1210-24  
Ref. arch WP-K-CR-1210-24V


## RELATED ACCESSORIES > RELATED LED > HIGH EFFICACY

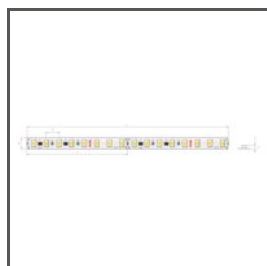


**K-HE-0480-HD-24V**  
K-HEHD-0480-24  
Ref. arch K-HE-0480-HD-24V



**K-HE-0960-HD-24V**  
K-HEHD-0960-24  
Ref. arch K-HE-0960-HD-24V



**K-HE-1440-HD-24V**  
K-HEHD-1440-24  
Ref. arch K-HE-1440-HD-24V

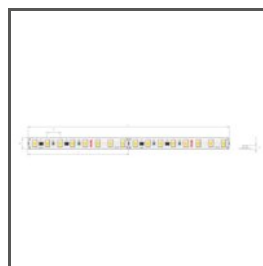

**K-HE-1920-HD-24V**  
K-HEHD-1920-24  
Ref. arch K-HE-1920-HD-24V

## RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CTT

# Profile GIZA-LL-T

Ref. A02479

Ref. arch C2479



**K-1530-RGB+W-24V**

K-RGBW-1530-24


Ref. arch K-1530-RGB+W-24V



**WP-K-1530-RGB+W-24V**

KWP-RGBW-1530-24


Ref. arch WP-K-1530-RGB+W-24V

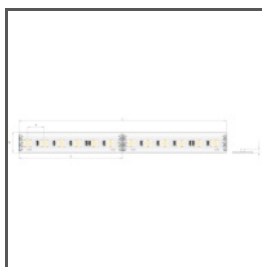

**K-1920-120-RGB-24V**

K-RGB-1920-120-24

Ref. arch K-1920-120-RGB-24V



**WP-K-1920-120-RGB-24V**

KWP-1920-120-RGB-24

Ref. arch WP-K-1920-120-RGB-24V

## RELATED ACCESSORIES > RELATED LED > WHITE MONO



**WP-K-1640-HD-IP65-24V**

KWP-GHD-1640-24

Ref. arch WP-K-1640-HD-IP65-24V



**WP-K-1910-HD-IP65-24V**

KWP-GHD-1910-24

Ref. arch WP-K-1910HDIP6524V



**WP-K-1220-IP65-24V**

KWP-1220-IP65-24

Ref. arch WP-K-1220-IP65-24V

## RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONDUCTIVE FASTENERS AND HEADS FOR PROFILES



FASTENER

**OS22-LIN-Z**

C28184L07, C28184L10

Ref. arch 42341L9005, 42341L9010



FASTENER

**OS22-PRET-Z**

C28186L07, C28186L10

Ref. arch 42344L9005, 42344L9010



FASTENER

**OS22-DUO-LIN-Z**

C28183L07, C28183L10

Ref. arch 42340L9005, 42340L9010



FASTENER

**OS22-DUO-PRET-Z**

C28185L07, 42343L9010

Ref. arch 42343L9005, 42343L9010

## RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > PROFILE MASKING COVERS

# Profile GIZA-LL-T

Ref. A02479

Ref. arch C2479



MASKING COVER


**MP-22**

C28261L01\_0.25,  
C28261L10\_0.25,  
C28261L07\_0.25

Ref. arch 17167, 17167L9010,  
17167L9005

---

**RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > TECHNICAL AND PROTECTIVE INSERTS**

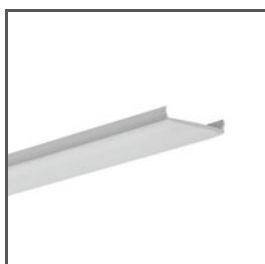

PROTECTIVE INSERT

**TECH-22**

C24531C02

Ref. arch 17124