


Cover HR-21

Ref. B17152F, B17152T

Ref. arch 17152, B17152T

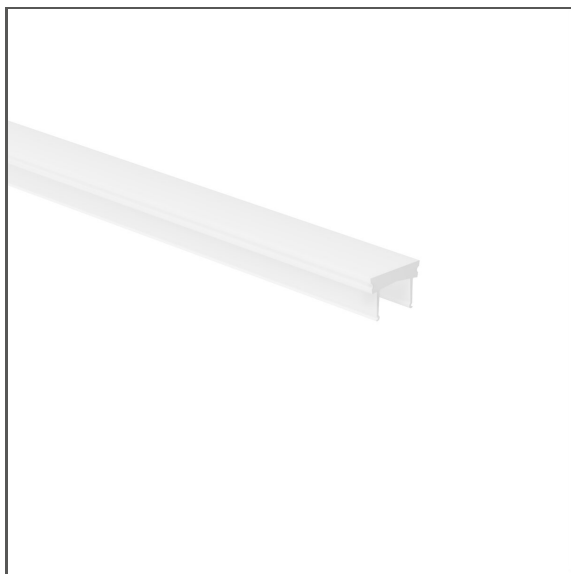

- For the construction of sealed lighting fixtures

APPLICATION

- LED protection and light diffusion in lighting fixtures


MOUNTING

- to the profile, by pressing

ADDITIONAL INFORMATION

- ATTENTION! rigid cover, not intended for bending or deformation
- standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING



TECHNICAL SPECIFICATIONS

Finish	frosted
Material	PMMA
Shape	flat
Maximum length on request	6000 mm
Light transmission	45 %
Width	21 mm
Possibility of obtaining a line of light	yes
High mechanical resistance	yes
UV resistance	yes

Length	Ref
1000 mm	B17152F_1 17152_1
2005 mm	B17152F_2 17152_2
3010 mm	B17152F_3 17152_3

Cover HR-21

Ref. B17152F, B17152T

Ref. arch 17152, B17152T

RELATED PROFILES > FACADE



HR-OPTI

A01844

Ref. arch C1844

RELATED PROFILES > FOR FLOORS



HR-MAX

A01829

Ref. arch C1829

RELATED SYSTEMS > IN-GROUND AND FACADE SYSTEMS



HR-MAX

A01829+A01827+A01828

Ref. arch C1829+C1827+C1828



HR-OPTI

A01844+C28090N00

Ref. arch C1844+42121