


# Cover HSP-49

Ref. B17058F, B17058M

Ref. arch 17058, 17169

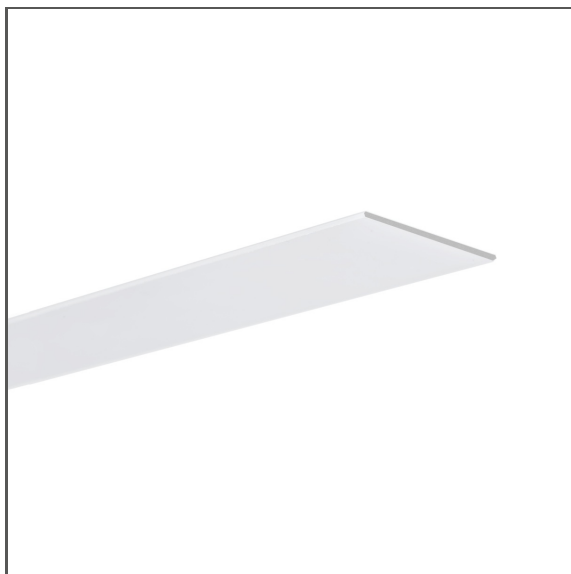

- Perfectly diffuses light

### APPLICATION

- LED protection and light diffusion in lighting fixtures


### MOUNTING

- to the profile, by pressing

### ADDITIONAL INFORMATION

- standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance  $\pm 1.5$  mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

### TECHNICAL DRAWING



### TECHNICAL SPECIFICATIONS

Material	PC
Shape	flat
Light transmission	73 %
Width	48 mm
UV resistance	yes


Finish	Maximum length on request	Length	Possibility of obtaining a line of light	Glare rating reduction UGR<19	Ref
frosted	3000 mm	1000 mm	yes	no	B17058F_1 17058_1
		2005 mm			B17058F_2 17058_2
		3010 mm			B17058F_3 17058_3
microprism	10000 mm	1000 mm	no	yes	B17058M_1 17169_1
		2005 mm			B17058M_2 17169_2
		3010 mm			B17058M_3 17169_3
microprism	10000 mm	10000 mm	no	yes	B17058M_10 17169OP_10

# Cover HSP-49


Ref. B17058F, B17058M

Ref. arch 17058, 17169

## SAMPLE PROJECTS

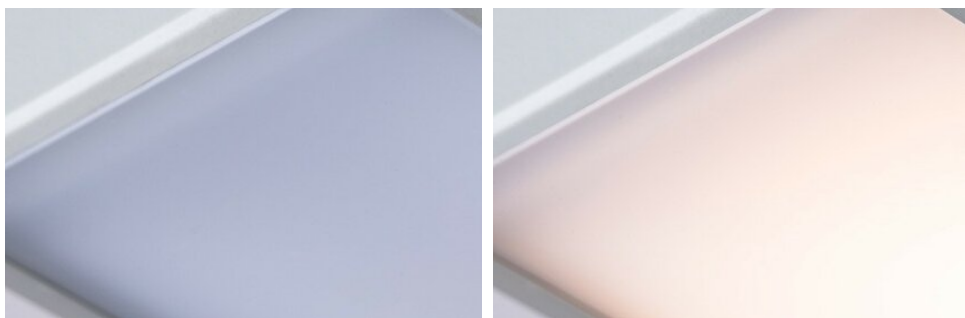

## RELATED PROFILES > FOR MAIN LIGHTING




**MOD-50**  
A18047  
Ref. arch 18047



**OMODO-50**  
A18053  
Ref. arch 18053

## RELATED SYSTEMS > GENERAL LIGHTING SYSTEMS



**MOD-50**  
18047



**MOD-KOL-50**  
A18053+A18060  
Ref. arch 18060+18053



**MOD-KOZE-50**  
A18055+A18053  
Ref. arch 18055+18053



**MOD-TEK-50**  
A18059+A18053  
Ref. arch 18059+18053