


# Cover JUN-40

Ref. B17055P\_1.5

Ref. arch 17055\_1.5

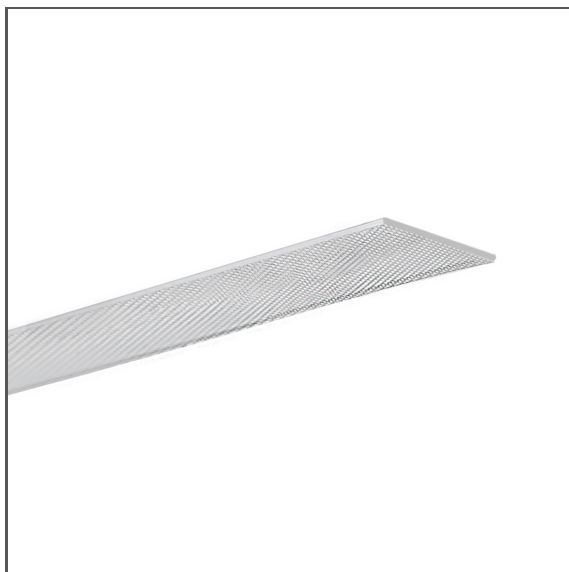

- Glare rating UGR < 19 possible
- High lumen output

## APPLICATION

- LED protection, light diffusion and glare reduction in lighting fixtures

## MOUNTING

- to the profile, by pressing


## ADDITIONAL INFORMATION

- ATTENTION! rigid cover, not intended for bending or deformation
- standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance  $\pm 1.5$  mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

## TECHNICAL DRAWING




## TECHNICAL SPECIFICATIONS

Color	 clear
Material	PMMA
Shape	flat
Length	1500 mm
Maximum length on request	3000 mm

Light transmission	92 %
Width	35 mm
Glare rating reduction UGR<19	yes
UV resistance	yes

## SAMPLE PROJECTS

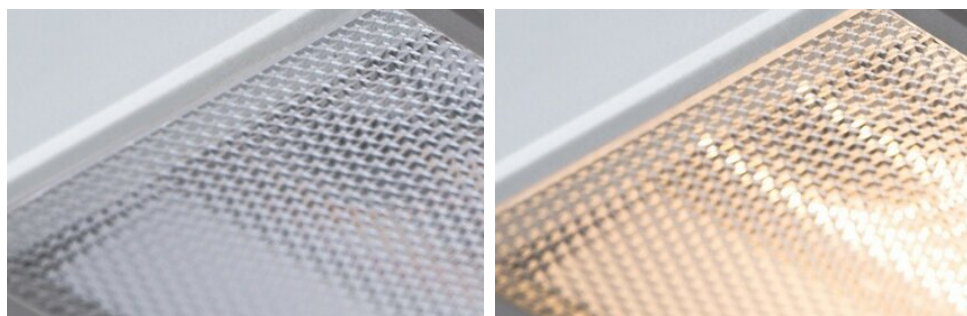

# Cover JUN-40

Ref. B17055P\_1.5

Ref. arch 17055\_1.5

## RELATED PROFILES > ARCHITECTURAL



**4050**  
A18050  
Ref. arch 18050



**4050-W**  
A18051  
Ref. arch 18051