


LED strip K-0960-24V

Ref. K-0960-24

Ref. arch K-0960-24V

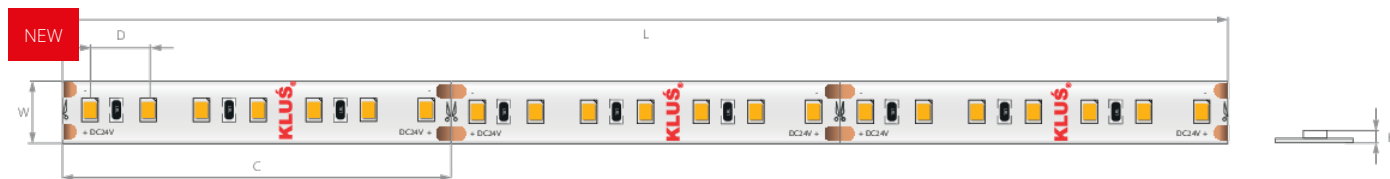

Dimensions: Width [W]: 8 mm | Max run length [L]: 10 m | Cut every [C]: 50 mm | LED spacing [D]: 6.25 mm | Height [H]: 1.6 mm



- CRI 90+
- Superior color consistency and dimming performance
- Smooth regulation of brightness
- Clean line of light when paired with most KLUŚ extrusions and LIGER cover

TECHNICAL SPECIFICATIONS

IP protection rating	20	Color temperature	Lumen output	Efficiency	Ref
CRI	90	2700 K	1090 lm/m	113 lm/W	K-27-0960-24 K-27-0960-24V
LxBy	L80B50	3000 K	1125 lm/m	117 lm/W	K-30-0960-24 K-30-0960-24V
Lifetime	60000 h	3000 K	1125 lm/m	117 lm/W	K-30-0960-24-R30 K-30-0960-24-R30
Working temperature	-20°C - 60°C	3500 K	1150 lm/m	119 lm/W	K-35-0960-24 K-35-0960-24V
Input voltage	24 V DC	4000 K	1195 lm/m	124 lm/W	K-40-0960-24 K-40-0960-24V
Power consumption	9.6 W/m	4000 K	1195 lm/m	124 lm/W	K-40-0960-24-R30 K-40-0960-24-R30
Beam angle	120°	5000 K	1185 lm/m	123 lm/W	K-50-0960-24 K-50-0960-24V
MacAdam's ellipse	3 SDCM				
Number of LEDs per 1 m	140				
Number of LEDs per cut section	7 pcs				
Energy consumption	10 kWh/1000h				
Warranty [months]	84				