


LED strip K-1200-RGB+27/65-24V

Ref. K-RGB27/65-1200-24

Ref. arch K-1200-RGB+27/65-24V

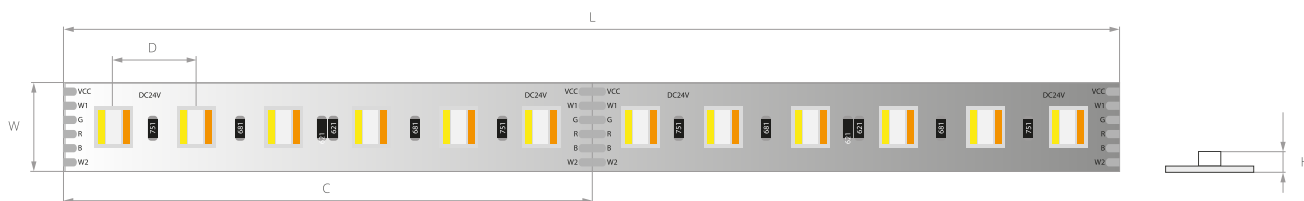

Dimensions: Width [W]: 12 mm | Max run length [L]: 5 m | Cut every [C]: 100 mm | LED spacing [D]: 16.7 mm | Height [H]: 2 mm



- UL Listed certification
- 3-Step MacAdam's ellipse, single binning (applies only to white color)

TECHNICAL SPECIFICATIONS

IP protection rating	20
LED color	RGB
CRI	80
Only valid for white	yes
Working temperature	-20°C - 60°C
Input voltage	24 V DC
Power consumption	12 W/m
Beam angle	120°
Number of LEDs per 1 m	60

Number of LEDs per cut section	6 pcs
Energy consumption	12 kWh/1000h
Warranty [months]	48
Klasa energetyczna	G

Color temperature	Lumen output	Efficiency
2700...6500 K	399 lm/m	33 lm/W
RED	70 lm/m	5 lm/W
GREEN	180 lm/m	15 lm/W
BLUE	40 lm/m	3 lm/W