


LED strip K-18/30-0960-24V

Ref. K-18/30-0960-24

Ref. arch K-30/18-0960-24V

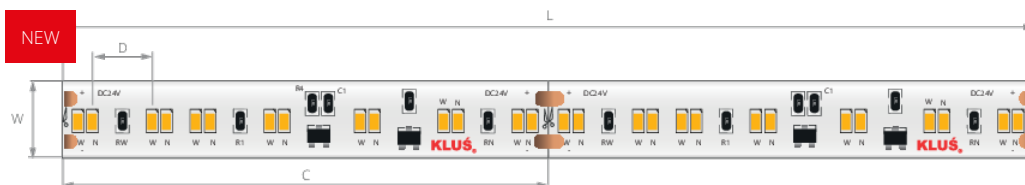

Dimensions: Width [W]: 10 mm | Max run length [L]: 5 m | Cut every [C]: 62.5 mm | LED spacing [D]: 6.6 mm | Height [H]: 3.5 mm



- UL Listed certification
- CRI 90+
- 3-Step MacAdam's ellipse, single binning

TECHNICAL SPECIFICATIONS

IP protection rating	20
CRI	90
Only valid for white	yes
LxBy	L70B50
Lifetime	60000 h
Working temperature	-20°C - 60°C
Input voltage	24 V DC
Power consumption	9.6 W/m

Beam angle	120°
MacAdam's ellipse	3 SDCM
Number of LEDs per 1 m	224
Number of LEDs per cut section	14 pcs
Energy consumption	12 kWh/1000h
Warranty [months]	84
Klasa energetyczna	G

Color temperature	Lumen output	Efficiency
1800...3000 K	732 lm/m	76 lm/W