


LED strip K-SE-0480-24V

Ref. K-SE-0480-24

Ref. arch K-SE-0480-24

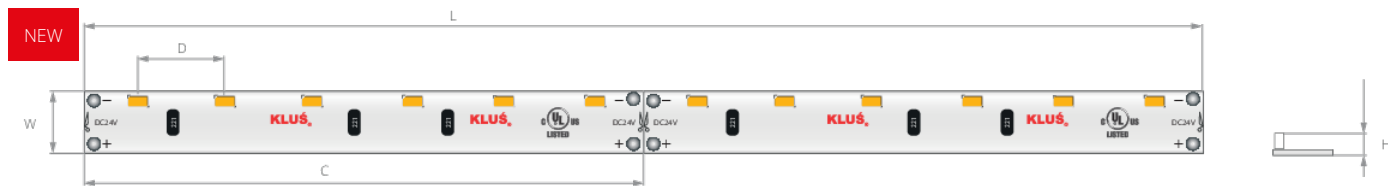

Dimensions: Width [W]: 5 mm | Max run length [L]: 6 m | Cut every [C]: 100 mm | LED spacing [D]: 16.7 mm | Height [H]: 2 mm



- Side emitting LED strip
- UL Listed
- CRI 90+
- 3-Step MacAdam's ellipse, single binning

TECHNICAL SPECIFICATIONS

IP protection rating	20
CRI	90
LxBy	L80B50
Lifetime	50000 h
Working temperature	-20°C - 60°C
Input voltage	24 V DC
Power consumption	4.8 W/m
Beam angle	120°
MacAdam's ellipse	3 SDCM
Number of LEDs per 1 m	60
Number of LEDs per cut section	6 pcs
Energy consumption	5 kWh/1000h
Warranty [months]	84
Energy class	G

Color temperature	Lumen output	Efficiency	Ref
2700 K	307 lm/m	63 lm/W	K-SE27-0480-24 K-SE-27-0480-24
3000 K	336 lm/m	70 lm/W	K-SE30-0480-24 K-SE-30-0480-24V
3500 K	355 lm/m	73 lm/W	K-SE35-0480-24 K-SE-35-0480-24
4000 K	369 lm/m	76 lm/W	K-SE40-0480-24 K-SE-40-0480-24
5000 K	396 lm/m	82 lm/W	K-SE50-0480-24 K-SE-50-0480-24