


Cover KOPRO-K

Ref. B17093M

Ref. arch 17093

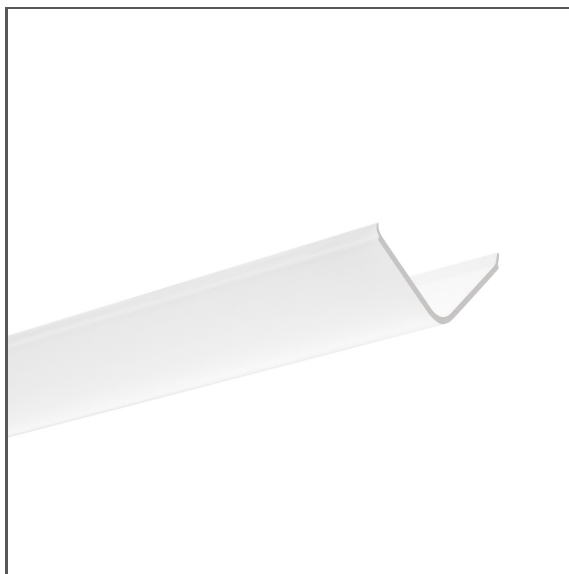

APPLICATION

- LED protection and light diffusion in lighting fixtures


MOUNTING

- to the profile, by pressing

ADDITIONAL INFORMATION

- ATTENTION! rigid cover, not intended for bending or deformation
- standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING



TECHNICAL SPECIFICATIONS

| | |
|--|----------------------------------|
| Color | <input type="checkbox"/> frosted |
| Material | PC |
| Shape | rectangular |
| Maximum length on request | 6000 mm |
| Light transmission | 66 % |
| Width | 37 mm |
| Possibility of obtaining a line of light | yes |

| Length | Ref |
|---------|-----------------------------|
| 1000 mm | B17093M_1 17093_1 |
| 2005 mm | B17093M_2 17093_2 |
| 3010 mm | B17093M_3 17093_3 |

Cover KOPRO-K

Ref. B17093M

Ref. arch 17093

RELATED PROFILES > ARCHITECTURAL



KOPRO

A06367

Ref. arch B6367