


Cover KOPRO-P

Ref. B17091M

Ref. arch 17091

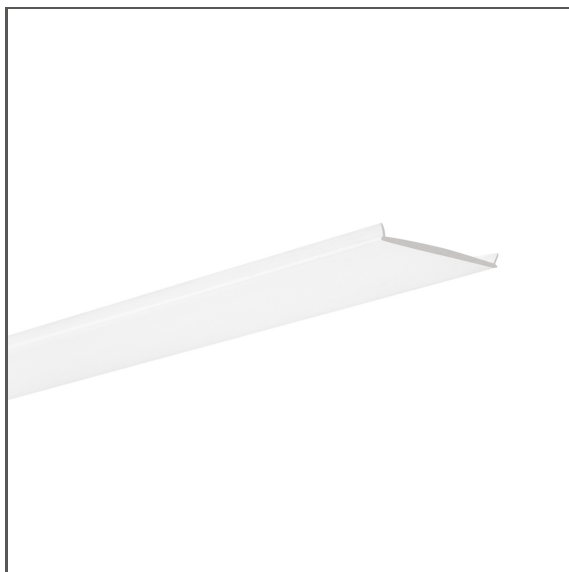

APPLICATION

- LED protection and light diffusion in lighting fixtures


MOUNTING

- to the profile, by pressing

ADDITIONAL INFORMATION

- ATTENTION! rigid cover, not intended for bending or deformation
- standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING



TECHNICAL SPECIFICATIONS

Color	<input type="checkbox"/> frosted
Material	PC
Shape	flat
Maximum length on request	10000 mm
Light transmission	66 %
Width	37 mm
Possibility of obtaining a line of light	yes

Length	Ref
1000 mm	B17091M_1 17091_1
2005 mm	B17091M_2 17091_2
3010 mm	B17091M_3 17091_3

Cover KOPRO-P

Ref. B17091M

Ref. arch 17091

RELATED PROFILES > ARCHITECTURAL



KOPRO
A06367
Ref. arch B6367



KOPRO-30
A07890
Ref. arch B7890