


Profile KOZEL-10

Ref. A01575

Ref. arch C1575

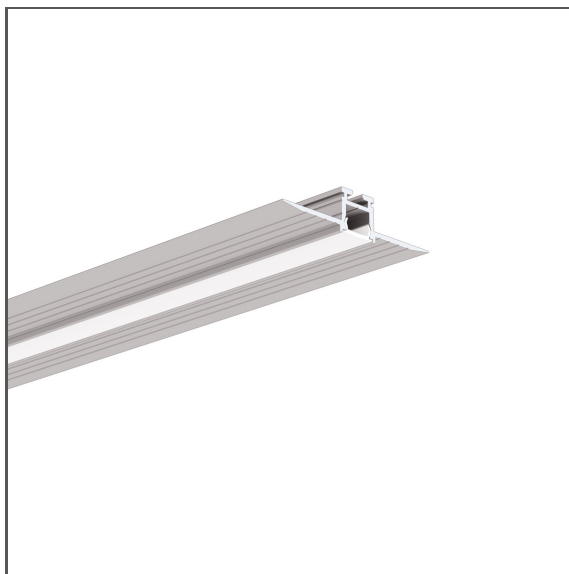

- Mounting to drywall
- Minimum height
- No collision with the ceiling structure
- Line of light flush with the surface
- Non visible aluminum elements

APPLICATION

- decorative lighting


MOUNTING

- in drywall, with mounting adhesive
- can be easily connected into runs and systems

ADDITIONAL INFORMATION

- in order to protect the lighting fixture during installation, a TECH-10 protective insert should be used
- smooth transition from a recessed into a suspended fixture
- standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING

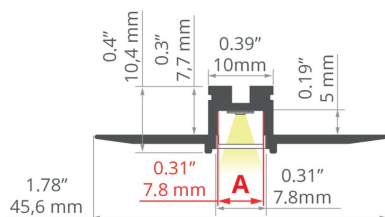

TECHNICAL SPECIFICATIONS

Material	aluminum
Color	■ silver non anodized
Possible fixture IP	20
Possible fixture shapes	polygonal
Profile cross-section	rectangular
Width	45.6 mm
Height	10.4 mm
LED gluing width A	7.8 mm
Building type	Commercial, HoReCa object, Residential
Facility zone	office, lobby / foyer, conference room, shop windows and exhibition, communication routes and corridors, kitchen, bathroom
The cover is cut to the length of the profile	yes
Can be easily connected into runs	yes
Mounting to drywall	yes
To cover with plaster	yes

Length	Ref
1000 mm	A01575N_1 C1575NA_1
2005 mm	A01575N_2 C1575NA_2
3010 mm	A01575N_3 C1575NA_3

Profile KOZEL-10



Ref. A01575

Ref. arch C1575


Wire out back of extrusion

yes

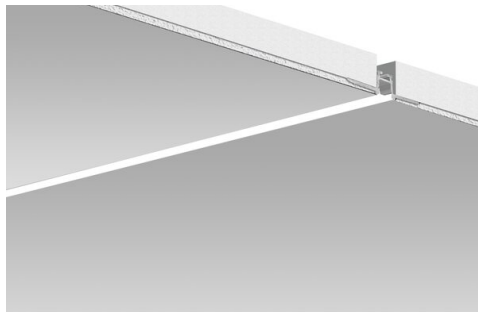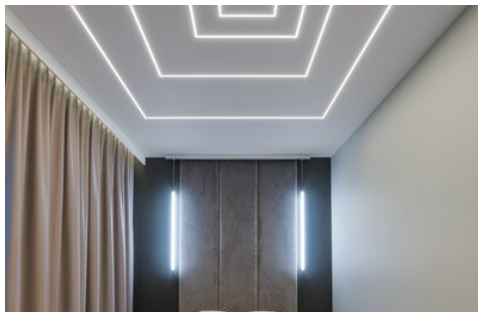

SAMPLE PROJECTS



RELATED ACCESSORIES > RELATED COVERS

NAME		MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
PIKO		PMMA	57 %	<input type="checkbox"/> frosted	B17034M 17034

RELATED ACCESSORIES > RELATED END CAPS

NAME		MATERIAL	COLOR	REF.
PIKO-ZM		ABS	<input checked="" type="checkbox"/> gray	C24307C02 24307
			<input checked="" type="checkbox"/> black	C24307C07 24384
PIKO-ZM-OTW		ABS	<input checked="" type="checkbox"/> gray	C24307C02TW 24359
			<input checked="" type="checkbox"/> black	C24307C07TW 24400

RELATED ACCESSORIES > RELATED LED > ULTRATHIN



K-1091-24V

K-1091-24

Ref. arch K-1091-24V

RELATED ACCESSORIES > RELATED LED > WHITE MONO

Profile KOZEL-10

Ref. A01575

Ref. arch C1575




5K-WP-K-1091-24V

KWP-5K-1091-24

Ref. arch 5K-WP-K-1091-24V

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > TECHNICAL AND PROTECTIVE INSERTS



PROTECTIVE INSERT

TECH-10

C24533C02

Ref. arch 17126