
# Profile LINO Ref. A08287

Ref. arch B8287





## **TECHNICAL DRAWING**

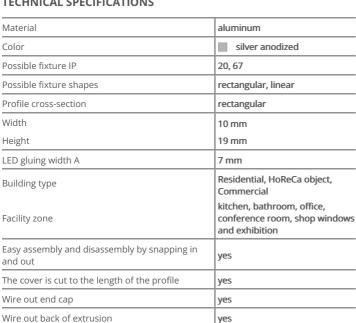

0.39 10 mm













Minimum width

#### **APPLICATION**

- furniture and decorative lighting

#### **MOUNTING**

- to the surface, suspended or recessed, using dedicated accessories, properly selected screws, with double-sided adhesive tape or mounting adhesive
- easy assembly and disassembly by snapping in and out

#### **ADDITIONAL INFORMATION**

Length

- for suspending small-size profiles, it is recommended to use a wire with a diameter of 0.5
- standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

# **TECHNICAL SPECIFICATIONS**

0.31" 7,8 mm

> 0.28" 7 mm

	I
1000 mm	A08287A_1 B8287ANODA_1
2005 mm	A08287A_2 B8287ANODA_2
3010 mm	A08287A_3 B8287ANODA_3

Ref



Ref. arch B8287



# **SAMPLE PROJECTS**







#### **RELATED ACCESSORIES > RELATED COVERS**

NAME		MATERIAL MATERIAL TRANSMITTANCECOLOR		REF.	
BENCO-7	NEW	silikon	58 %	frosted	B17069M 17069
PIKO		РММА	57 %	frosted	B17034M <sub>17034</sub>

#### **RELATED ACCESSORIES > RELATED END CAPS**

NAME		MATERIAL	COLOR	REF.
LINO	8	PP	gray	C24201C02 24201
LINO-OTW	8	PP	gray	C24201C02TW 24250

## **RELATED ACCESSORIES > RELATED LED > ULTRATHIN**



**K-1091-24V** K-1091-24 Ref. arch K-1091-24V

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > FASTENERS AND HEADS FOR PROFILES

# Profile LINO Ref. A08287







FASTENER K-10-PP C28235N00 Ref. arch 42670



FASTENER
K-10-WL
C28237N00
Ref. arch 42672



FASTENER
K-10-WP
C28236N00
Ref. arch 42671

## RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > MOUNTING BRACKETS



MOUNTING BRACKET
K-10
C24340C00
Ref. arch 24340