

Profile PDS-NK

Ref. A01588

Ref. arch C1588



- Invisible groove edge
- Small bending radius
- Wide range of accessories

APPLICATION

- furniture, main and decorative lighting


MOUNTING

- recessed, with mounting adhesive or double-sided adhesive tape

ADDITIONAL INFORMATION

- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING

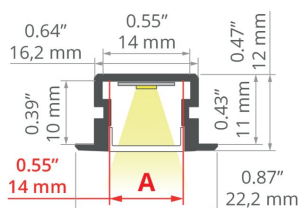

TECHNICAL SPECIFICATIONS

Material	aluminum
Possible fixture IP	20, 67
Profile cross-section	rectangular
Width	22.2 mm
Height	12 mm
LED gluing width A	14 mm
Number of LED strips A (8 mm wide)	1
Possibility of obtaining a line of light	yes
Possibility of bending	yes
Minimum external radius	250 mm
Minimum internal radius	150 mm
Building type	Residential, HoReCa object, Entertainment/ Arts, Retail
Facility zone	kitchen, bathroom, furniture, lobby / foyer, conference room
The cover is cut to the length of the profile	yes
Wire out end cap	yes
Wire out back of extrusion	yes


Color	Length	Ref
■ silver anodized	1000 mm	A01588A_1 C1588ANODA_1
	2005 mm	A01588A_2 C1588ANODA_2
	3010 mm	A01588A_3 C1588ANODA_3
■ black anodized	1000 mm	A01588A07_1 C1588K7_1
	2005 mm	A01588A07_2 C1588K7_2
	3010 mm	A01588A07_3 C1588K7_3
□ white lacquered	1000 mm	A01588L100D_1 C1588L90100D_1
	2005 mm	A01588L100D_2 C1588L90100D_2
	3010 mm	A01588L100D_3 C1588L90100D_3

Profile PDS-NK







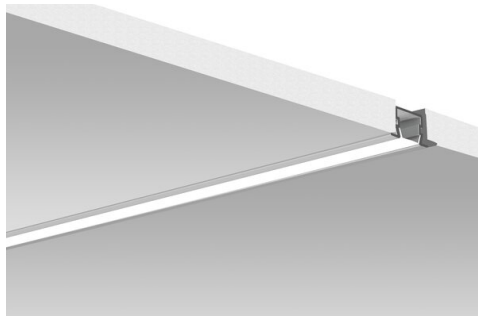










Ref. A01588

Ref. arch C1588

SAMPLE PROJECTS



RELATED ACCESSORIES > RELATED COVERS





















NAME		MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
LENSO	NEW	 PC	46.6 %	 clear	B17112T 17112
KA		 PC	63 %	 frosted	B17035M 17035
			91 %	 clear	B17035T 17036
KA-PRO		 PC	67 %	 frosted	B17064M 17064
			94 %	 clear	B17064T 17065
HS		 PC	73 %	 frosted	B17208M 1369
			94 %	 clear	B17208T 1370
KA-COM		 PVC	70 %	 frosted	B17179M 17179
			93 %	 clear	B17179T 17180
LIGER		 PC	70 %	 frosted	B17037M 17037
			32 %	 black	B17037C 17040

Profile PDS-NK

Ref. A01588

Ref. arch C1588


RELATED ACCESSORIES > RELATED END CAPS

NAME	MATERIAL	COLOR	REF.
PDS-NK		ABS	 gray C24338C02 24338
			 white C24338C10 24402
			 black C24338C07 24342
			 silver C24338L01 24448
PDS-NK-OTW		ABS	 gray C24338C02TW 24339
			 white C24338C10TW 24404
			 silver C24338L01TW 24449
			 black C24338C07TW 24343
PDS-LNK		ABS	 gray C24428C02 24428
			 white C24428C10 24438
			 silver C24428L01 24440
			 black C24428C07 24432
PDS-LNK-OTW		ABS	 gray C24428C02TW 24430
			 white C24428C10TW 24439
			 silver C24428L01TW 24441
			 black C24428C07TW 24434

RELATED ACCESSORIES > RELATED LED



8K-WP-K-1210-12V
8K-WP-K-1210-12V



8K-WP-K-1220-12V
_błąd
Ref. arch 8K-WP-K-1220-12V




8K-WP-K-1275-12V
_błąd
Ref. arch 8K-WP-K-1275-12V

RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CTT

Profile PDS-NK

Ref. A01588

Ref. arch C1588



**8K-WP-K-1920-120-RGB-
24V**

KWP-8KHDRGB-1920-24

Ref. arch 8KWPK1920120RGB24V

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > OTHER



GLAND

6x1,2

C24517C07

Ref. arch 00802