

Profile PIKO-O

Ref. A01167

Ref. arch C1167



- Lighting fixture with round cross-section
- Minimum cross-section diameter
- Smooth profile surfaces
- Continuous lighting angle adjustment possible
- Small bending radius

APPLICATION

- decorative lighting and functional


MOUNTING

- suspended, using dedicated accessories
- easy assembly and disassembly by snapping in and out

ADDITIONAL INFORMATION




- for suspending small-size profiles, it is recommended to use a wire with a diameter of 0.5 mm
- standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING



TECHNICAL SPECIFICATIONS

Material	aluminum
Possible fixture IP	20
Possible fixture shapes	round
Profile cross-section	round
Width	10.5 mm
Height	7 mm
LED gluing width A	6 mm
Lighting angle adjustment up to	360
Possibility of obtaining a line of light	yes
Possibility of bending	yes
Minimum external radius	1000 mm
Minimum internal radius	150 mm
Building type	Commercial, Retail, Entertainment/ Arts
Facility zone	office, lobby / foyer, advertising / POS, shop windows and exhibition, bathroom
Easy assembly and disassembly by snapping in and out	yes

Color	Length	Ref
 silver anodized	1000 mm	A01167A_1 C1167ANODA_1
	2005 mm	A01167A_2 C1167ANODA_2
	3010 mm	A01167A_3 C1167ANODA_3
 black anodized	1000 mm	A01167A07_1 C1167K7_1
	2005 mm	A01167A07_2 C1167K7_2
	3010 mm	A01167A07_3 C1167K7_3
 white lacquered	1000 mm	A01167L10OD_1 C1167L9010OD_1
	2005 mm	A01167L10OD_2 C1167L9010OD_2
	3010 mm	A01167L10OD_3 C1167L9010OD_3


Profile PIKO-O

Ref. A01167

Ref. arch C1167

The cover is cut to the length of the profile	yes
Wire out end cap	yes
Wire out back of extrusion	yes

SAMPLE PROJECTS

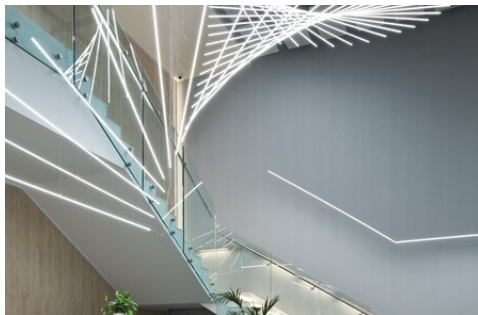

RELATED ACCESSORIES > RELATED COVERS

NAME		MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
LUK-10		PMMA	63 %	frosted	B17164M 17164
			42 %	black	B17064C 17088
			87 %	semi-transparent	B17064F 17090

RELATED ACCESSORIES > RELATED END CAPS

NAME		MATERIAL	COLOR	REF.
PIKO-O-90		PA12	black	C24369C7015 24369
PIKO-O		ABS	silver	C28223C7012 42631
			white	C24321C10 24413
			black	C24321C07 24327
PIKO-O-OTW		ABS	gray	C24321C02TW 24376
			white	C24321C10TW 24414
			black	C24321C07TW 24360

RELATED ACCESSORIES > RELATED LED > ULTRATHIN

Profile PIKO-O

Ref. A01167

Ref. arch C1167



K-1091-24V

K-1091-24

Ref. arch K-1091-24V

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > FASTENERS AND HEADS FOR PROFILES



FASTENER

PLD-10-PP

C28175N00

Ref. arch 42291



FASTENER

PLD-10-WL

C28177N00

Ref. arch 42293



FASTENER

PLD-10-WP

C28176N00

Ref. arch 42292

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > MOUNTING BRACKETS



MOUNTING BRACKET

PLD-10

C24375C00

Ref. arch 24375