

# Fastener PUSZ-LIN-ZD

Ref. C28164N00, C28164L10, C28164L07

Ref. arch 42279, 42279L9010, 42279L9005



- Lengthwise suspension on a wire
- High lifting capacity
- Single pole conductivity possible


## APPLICATION

- for suspending LED lighting fixtures

## MOUNTING

- to the lighting fixture, with a large lock
- to the wire, using a plug and a clamp sleeve

## TECHNICAL DRAWING

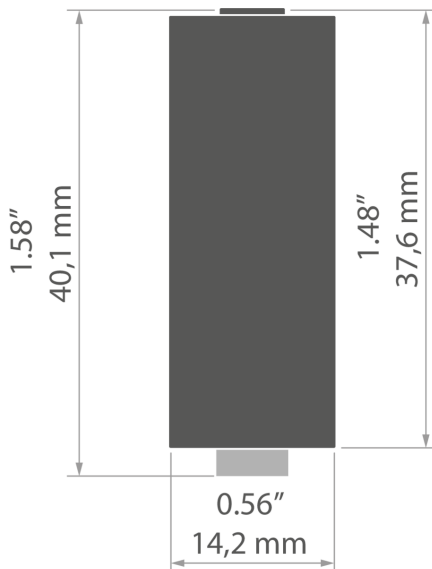

## TECHNICAL SPECIFICATIONS

Width	14.2 mm
Height	40.1 mm
Working temperature	55°C
Lifting capacity	30 kg
Maximum current	12 A
Loss of voltage	0.05 V

Material	Color	Ref
stainless steel, brass, nylon	■ silver	C28164N00 42279
aluminum, brass, nylon	□ white lacquered	C28164L10 42279L9010
aluminum, brass, nylon	■ black lacquered	C28164L07 42279L9005

# Fastener PUSZ-LIN-ZD

Ref. C28164N00, C28164L10, C28164L07


Ref. arch 42279, 42279L9010, 42279L9005

## RELATED PROFILES > ARCHITECTURAL



**GIZA-LL**  
A00758  
Ref. arch C0758


## RELATED PROFILES > FOR MAIN LIGHTING



**DES**  
A18030  
Ref. arch 18030



**GLADES**  
A18036  
Ref. arch 18036



**TRIADA**  
A04476  
Ref. arch B4476


## RELATED PROFILES > MOUNTING TRACKS



**TESPO**  
A18020  
Ref. arch 18020



**TEST-74**  
A04507  
Ref. arch W4507



**TETRA-43**  
A04478  
Ref. arch W4476

## RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > WIRES AND RODS



**WIRE**  
**CU FI 0,95 mm**  
Z70240  
Ref. arch 70240