


Profile SEKODU

Ref. A06597

Ref. arch B6597

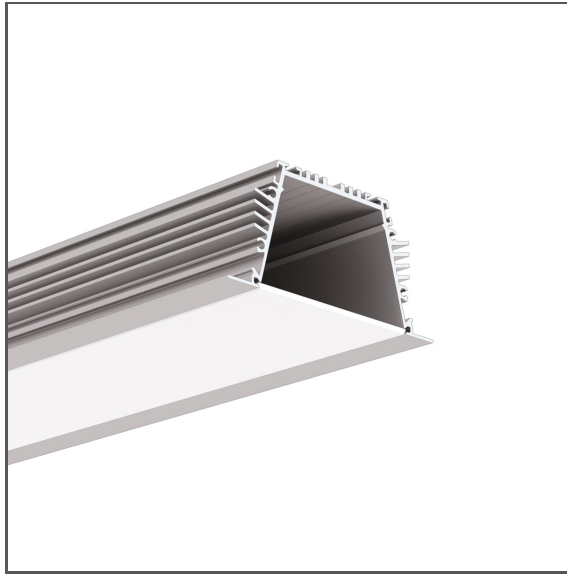

IP20



- Mounting to drywall
- High lumen output
- Invisible groove edge
- Very good heat dissipation

APPLICATION

- main and decorative lighting

MOUNTING


- recessed, using dedicated accessories
- can be easily connected into runs and systems

ADDITIONAL INFORMATION


- standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance $+ 5$ mm); for selected covers: 6050 mm, 10050 mm (tolerance $+ 5$ mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING

1:2

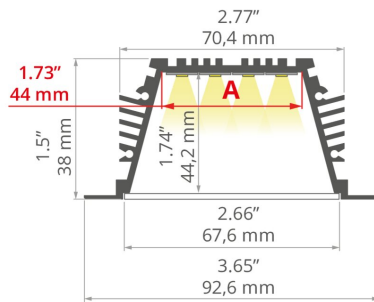

TECHNICAL SPECIFICATIONS

Material	aluminum
Color	 silver anodized
Possible fixture IP	20
Possible fixture shapes	polygonal
Profile cross-section	rectangular
Width	92.6 mm
Height	44.2 mm
LED gluing width A	44 mm
Number of LED strips A (8 mm wide)	5
Possibility of obtaining a line of light	yes
Building type	Commercial, Retail, Entertainment/ Arts, HoReCa object
Facility zone	communication routes and corridors, office, lobby / foyer, conference room
The cover is cut to the length of the profile	yes
Can be easily connected into runs	yes
Mounting to drywall	yes

Length	Ref
1000 mm	A06597A_1 B6597ANODA_1
2005 mm	A06597A_2 B6597ANODA_2
3010 mm	A06597A_3 B6597ANODA_3

Profile SEKODU

Ref. A06597



Ref. arch B6597

KLUŚ Inspiring
Solutions

Wire out back of extrusion

yes

SAMPLE PROJECTS

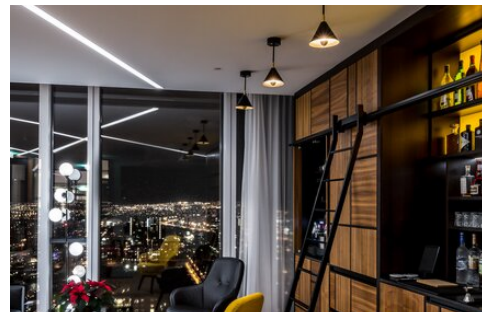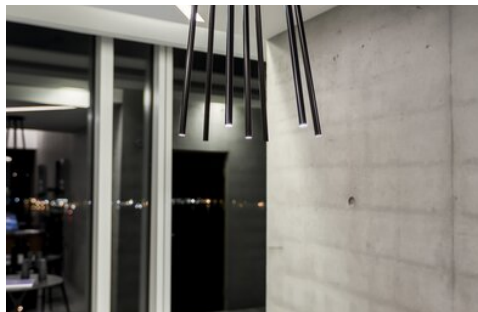


RELATED ACCESSORIES > RELATED COVERS

NAME	MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
SZER	PC	73 %		B17081M 17081
		94 %	<input checked="" type="checkbox"/> clear	B17081T 17082
		63 %	<input type="checkbox"/> frosted	B17083M 17083
	PMMA	88 %	<input type="checkbox"/> frosted	B17084M 17084
			17085	


RELATED ACCESSORIES > RELATED END CAPS

NAME	MATERIAL	COLOR	REF.
SEKODU	PP	<input checked="" type="checkbox"/> gray	C28004C02 24107
		<input type="checkbox"/> silver	C28004L01 24108


RELATED ACCESSORIES > RELATED LED > HIGH EFFICACY




K-HE-0480-HD-24V
K-HEHD-0480-24
Ref. arch K-HE-0480-HD-24V



K-HE-0960-HD-24V
K-HEHD-0960-24
Ref. arch K-HE-0960-HD-24V



K-HE-1440-HD-24V
K-HEHD-1440-24
Ref. arch K-HE-1440-HD-24V



K-HE-1920-HD-24V
K-HEHD-1920-24
Ref. arch K-HE-1920-HD-24V

Profile SEKODU

Ref. A06597

Ref. arch B6597

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONNECTORS



CONNECTOR

ZM-NA-120

C28242N00

Ref. arch 42729

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > OTHER




GLAND

6,4x3

C42264C07

Ref. arch 42264

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > SPRINGS FOR RECESSED MOUNT AND MOUNTING TRACKS



SPRING

KMA

C24503N00

Ref. arch 00838