


Cover SZER

Ref. B17081M, B17081T, B17083M, B17084M, 17085

Ref. arch 17081, 17082, 17083, 17084, 17085

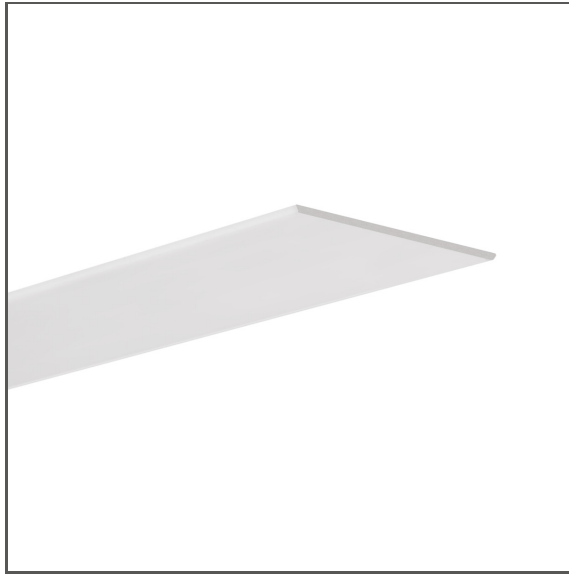

APPLICATION

- LED protection and light diffusion in lighting fixtures

MOUNTING

- to the profile, by pressing

ADDITIONAL INFORMATION

- standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
 - when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING



TECHNICAL SPECIFICATIONS

Shape	flat
Width	67 mm
UV resistance	yes

Color	Material	Length	Light transmission	Possibility of obtaining a line of light	Ref
<input type="checkbox"/> frosted	PC	1000 mm	73 %	yes	B17081M_1 17081_1
		2005 mm			B17081M_2 17081_2
		3010 mm			B17081M_3 17081_3
<input checked="" type="checkbox"/> clear	PC	1000 mm	94 %	no	B17081T_1 17082_1
		2005 mm			B17081T_2 17082_2
		3010 mm			B17081T_3 17082_3
<input type="checkbox"/> frosted	PC	1000 mm	63 %	yes	B17083M_1 17083_1
		2005 mm			B17083M_2 17083_2
		3010 mm			B17083M_3 17083_3
		1000 mm			B17084M_1 17084_1
		2005 mm			B17084M_2 17084_2


Cover SZER

Ref. B17081M, B17081T, B17083M, B17084M, 17085

Ref. arch 17081, 17082, 17083, 17084, 17085

Color <input type="checkbox"/> frosted	Material PMMA	Length	Light 88 % transmission	Possibility of obtaining a line of light	Ref
		3010 mm			B17084M_3 17084_3
<input type="checkbox"/> frosted	PMMA	1000 mm	88 %	no	17085_1
		2005 mm			17085_2
		3010 mm			17085_3


RELATED PROFILES > FOR MAIN LIGHTING



SEKODU
A06597
Ref. arch B6597



SEKOMA
A06595
Ref. arch B6595



SEPOD
A06593
Ref. arch B6593