

**PRODUCT DESCRIPTION**

Fastener with increased load capacity, used for hanging fixtures on a steel cable. In addition, it can be used as a connection for one pole of electricity as the [steel cable with Cu core](#) can be conductive. Attached to the extrusion with a screw through a drilled and milled hole. The screw has a flat head, thanks to which it is flush with the internal surface of the extrusion after mounting. The power cable can be inserted into the fastener through the hole in the screw head.

Fill empty fields


Product nr.

Fixture type


Company

Job name


Date

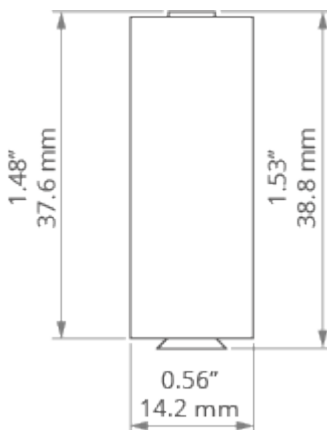**TECHNICAL SPECIFICATION****TECHNICAL DRAWING**


**RELATED PROFILES**



GIZA-LL profile  
Ref: C0758



OPK-4 Profile  
Ref: C0370




3035 Profile  
Ref: 18039




JAZ Profile  
Ref: B8547




OLEK Profile  
Ref: B8505




SILER Profile  
Ref: B9325



MICRO-ALU Profile  
Ref: B1888



TAMI Profile  
Ref: B5390




PDS-4-ALU Profile  
Ref: B1718



PDS-ZM Profile  
Ref: B7696



REGULOR Profile  
Ref: B468+43




TEST-36 Profile  
Ref: B6639




TEST-74 Profile  
Ref: W4507




TETRA-43 Profile  
Ref: W4476




TETRA-78 Profile  
Ref: W4508




GIZA Profile  
Ref: B5556




SEPOD Profile  
Ref: B6593




TESPO Profile  
Ref: 18020




3035-O Profile  
Ref: B8441




PDS-4-PLUS  
Profile  
Ref: C1263




PDS-ZMG Profile  
Ref: C1418




MICRO-HG Profile  
Ref: C1419




TAPO Profile  
Ref: C1919




PDS-ZM-PLUS  
Profile  
Ref: C2056




4050 Profile  
Ref: 18050



4050-W Profile  
Ref: 18051



GLAZA-LL Profile  
Ref: C2627



MICRO-PLUS  
Profile  
Ref: C2966