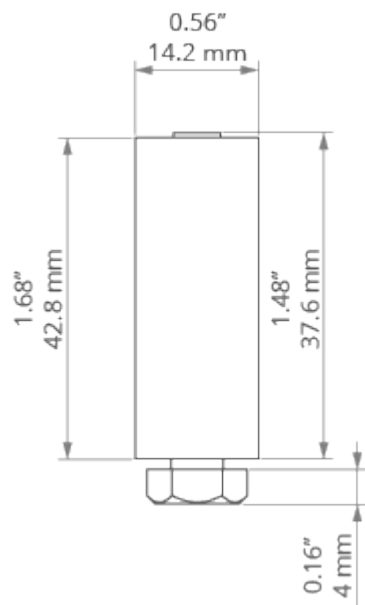


PRODUCT DESCRIPTION


Fastener with increased load capacity, used for hanging fixtures on a threaded, steel FI-3 ROD. In addition, it can be used as a connection for one pole of electricity. Attached to the extrusion with a screw through a drilled hole. The power cable can be inserted into the fastener through the hole in the screw head.

Fill empty fields


Product nr.
Fixture type
Company
Job name
Date

**TECHNICAL SPECIFICATION****TECHNICAL DRAWING**


RELATED PROFILES




3035 Profile
Ref: 18039




TEST-74 Profile
Ref: W4507




TETRA-78 Profile
Ref: W4508



TESPO Profile
Ref: 18020



4050 Profile
Ref: 18050



4050-W Profile
Ref: 18051

RELATED PRODUCTS

ACCESSORIES



100-PUSZ-ALU
Rod silver 1 m
Ref:
42530ANODA_1



200-PUSZ-ALU
Rod silver 2 m
Ref:
42530ANODA_2